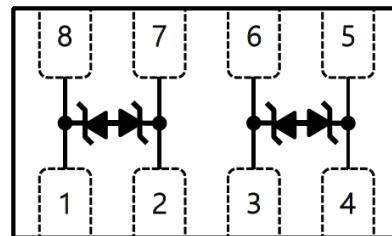


## Ultra Low Capacitance TVS Array

**Features**

- IEC 61000-4-2 (ESD)  $\pm 30\text{kV}$  (air),  $\pm 30\text{kV}$  (contact)
- IEC 61000-4-5 (Lightning) 10A (8/20 $\mu\text{s}$ )
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- Ultra-low Capacitance (IO to I/O) : 0.9 pF Max.
- Protects two line pairs
- Ultra-low leakage : nA level
- Operating voltage : 2.5V
- Ultra-low clamping voltage

**Pin Configuration****Applications**

- High-speed differential data lines
- 10/100/1000 Ethernet
- RJ-45 Connectors
- LAN/WAN Device
- Ethernet interface

**Circuit Diagram****Mechanical Characteristics**

- Package: DFN2010-8L (2.0×1.0×0.36mm)
- Moisture Sensitivity: Level 1 per J-STD-020
- RoHS Compliant

Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ Unless otherwise noted)			
Parameter	Symbol	Value	Unit
Peak Pulse Power ( $t_p = 8/20\mu\text{s}$ )	$P_{PK}$	55	W
Peak Pulse Current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	10	A
ESD per IEC 61000-4-2 (Air)	$V_{ESD}$	$\pm 30$	kV
ESD per IEC 61000-4-2 (Contact)		$\pm 30$	kV
Operating Junction Temperature Range	$T_J$	-40 to +85	°C
Storage Temperature Range	$T_{STG}$	-55 to +125	°C
Lead Soldering Temperature	$T_{SOL}$	260 (10 sec.)	°C

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  Unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Reverse Working Voltage	$V_{RWM}$				2.5	V
Breakdown Voltage	$V_{BR}$	$I_{BR} = 1\text{mA}$	5		10	V
Reverse Leakage Current	$I_R$	$V_{RWM} = 2.5\text{V}$			0.05	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP} = 1\text{A}$ ( $t_p = 8/20\mu\text{s}$ )	2.5	3.2		V
Clamping Voltage	$V_C$	$I_{PP} = 5\text{A}$ ( $t_p = 8/20\mu\text{s}$ )	4.0	4.3		V
Clamping Voltage	$V_C$	$I_{PP} = 10\text{A}$ ( $t_p = 8/20\mu\text{s}$ )	5.0	5.3		V
TLP Clamping Voltage ( $t_{period} = 100\text{ns}, t_r = 1\text{ns}$ )	$V_C$	$I_{TLP} = 16\text{A}$ , I/O Pin to I/O Pin		8.5		V
TLP Dynamic Resistance ( $t_{period} = 100\text{ns}, t_r = 1\text{ns}$ )	$R_{DYN}$	I/O Pin to I/O Pin		0.25		$\Omega$
Junction capacitance	$C_J$	$V_R = 2.5\text{V}$ , $f = 1\text{MHz}$			0.9	pF

### Typical Operating Characteristics ( $T_A = 25^\circ\text{C}$ Unless otherwise noted)

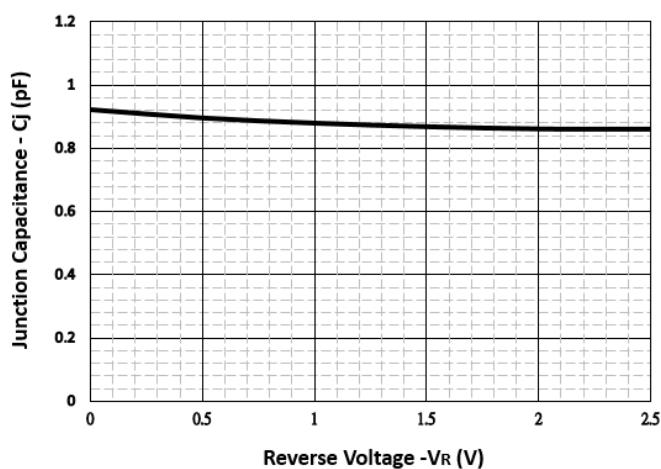


Fig 1. Junction Capacitance vs. Reverse Voltage

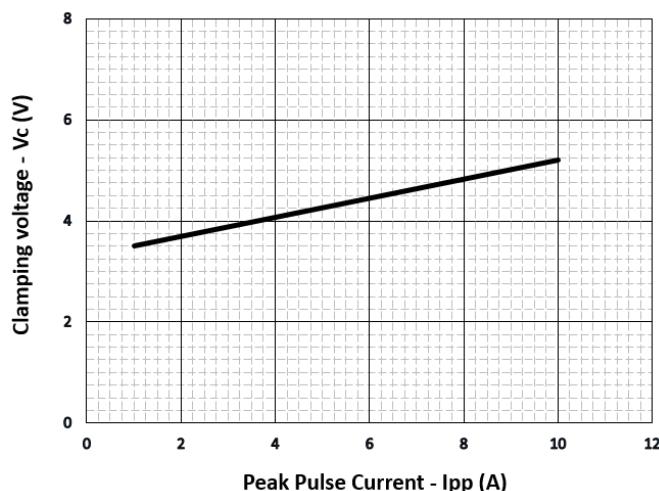


Fig 2. Clamping Voltage vs. Peak Pulse Current

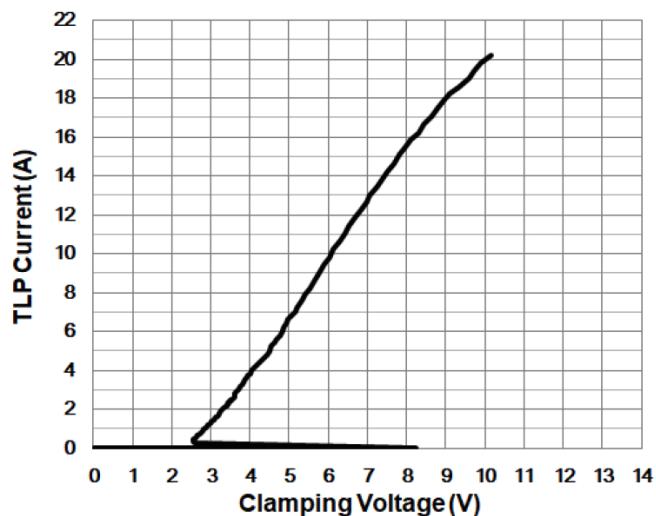


Fig 3. TLP Waveform ( tperiod = 100ns,tr = 1ns)

## Package Mechanical Data

Symbol	Dimensions in millimeters		
	Min.	Typ.	Max.
A	0.32	--	0.40
A1	0.00	--	0.05
A3	0.20 REF		
b	0.20	0.25	0.30
D	1.90	2.00	2.10
E	0.90	1.00	1.10
e	0.50 BSC		
L	0.30	0.35	0.40

## Suggested Land Layout

Symbol	Dimensions in millimeters
C	0.5
X	0.3
X1	1.8
Y	0.6
Y1	1.4

## Ordering information

Part Number	Package	Marking code	Base qty	Reel Size	Delivery mode
			(pcs)	(inch)	
SK025L2BDN	DFN2010-8L	E06	3,000	7	Tape and reel