

Gas Discharge Tubes(GDT)



Description

Gas discharge tubes (GDT) use noble gasses enclosed in ceramic tubes to provide an alternate circuit path for voltage spikes. The ceramic envelope and with nickel connectors allow for high loads.

SMD5050 Gas Discharge Tubes (GDT) series has a surge rating of 5kA, 8/20 μ s. Offered in a Squared Surface Mount package, which helps to make pick and place on PCB process easier.

This GDT series is perfectly suited for broadband equipment applications. The GDT's low off-state capacitance is compatible with high bandwidth applications and this capacitance loading value does not vary if the voltage across the GDT changes.

SMD5050 Gas Discharge Tube (GDT) series are specifically designed for protection of electrical, multimedia, and communication equipment against over voltage transients in surface mount assembly applications.

Electrical symbol




Features

- ◆ Excellent response to fast rising transients
- ◆ Stable breakdown voltage
- ◆ GHz working frequency
- ◆ 8/20 μ s Impulse current capability: 5KA
- ◆ Surface Mount package
- ◆ Non-Radioactive
- ◆ Ultra Low capacitance(<0.8pF)
- ◆ Lead-free and RoHS compliant
- ◆ Size: 4.2mm*5mm*5mm
- ◆ Storage and operational temperature: -40~+90°C
- ◆

Applications

- ◆ CATV equipment
- ◆ RS 485
- ◆ Telecom Base Station
- ◆ Power Supply AC Main
- ◆ General telecom equipment
- ◆ Broad Band equipment
- ◆ Medical Electronics
- ◆ ADSL equipment, including ADSL2+
- ◆ XDSL equipment
- ◆ Satellite and CATV equipment
- ◆ IEEE 802.3 compliant Ethernet interfaces

Part Number Code

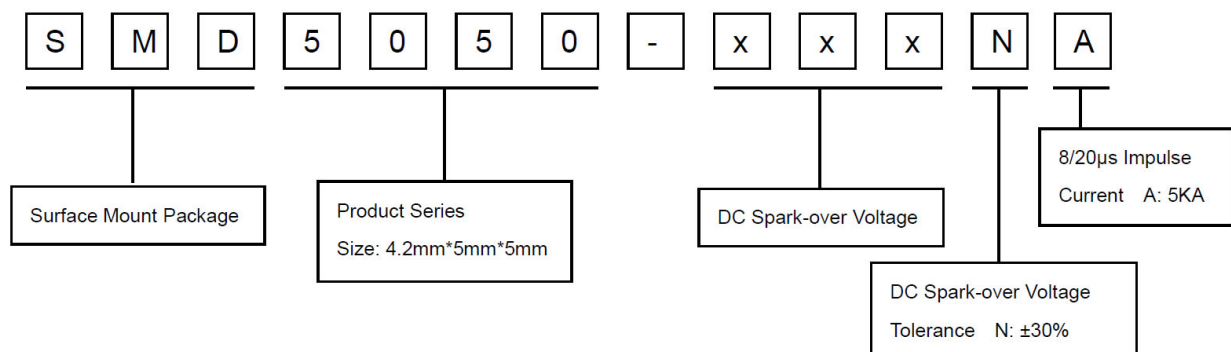

Gas Discharge Tubes(GDT)

Electrical Characteristics

Terms in accordance with ITU-T Rec. K.12, IEC 61643-311, GB/T 9043.

Part Number	DC Spark-over Voltage ^{1) 2)} @100V/S	Impulse Spark-over Voltage		Insulation Resistance ³⁾	Capacitance @1 MHz	Life Ratings				
		100V/μS	1KV/μS			Impulse Discharge Current @8/20μS		Impulse Life @10/1000μS 100A		
		Max	Max			Min	Max	Nominal ±5 times	Max 1 time	Min
		V	V			V	GΩ	pF	KA	KA
SMD5050-075NA	75±30%	500	600	1	0.8	5	10	300		
SMD5050-090NA	90±30%	500	600	1	0.8	5	10	300		
SMD5050-150NA	150±30%	500	600	1	0.8	5	10	300		
SMD5050-200NA	200±30%	600	700	1	0.8	5	10	300		
SMD5050-230NA	230±30%	600	700	1	0.8	5	10	300		
SMD5050-300NA	300±30%	750	850	1	0.8	5	10	300		
SMD5050-350NA	350±30%	800	850	1	0.8	5	10	300		
SMD5050-400NA	400±30%	850	950	1	0.8	5	10	300		
SMD5050-420NA	420±30%	850	950	1	0.8	5	10	300		
SMD5050-470NA	470±30%	900	1000	1	0.8	5	10	300		
SMD5050-600NA	600±30%	1100	1200	1	0.8	5	10	300		
SMD5050-800NA	800±30%	1100	1400	1	0.8	5	10	300		

Glow Voltage at 10mA..... ~60V
 Arc Voltage at 1A..... ~10V
 Glow to Arc transition Current..... <0.8A
 Operation and storage temperature..... -40~+90°C
 Climatic category (IEC 60068-1)..... 40/90/21
 Marking..... Without


Notes :

- 1) At delivery AQL 0.65 level II, DIN ISO 2859
- 2) In ionized mode
- 3) Insulation Resistance Measuring Voltage :
 70V at DC 25V
 90V~150V at DC 50V
 Other at DC 100V

Gas Discharge Tubes(GDT)


Dimensions

Symbol	Millimeters	Inches
A	5.0±0.2	0.197±0.008
B	5.0±0.2	0.197±0.008
C	4.2±0.3	0.165±0.012
D	0.5±0.1	0.020±0.004



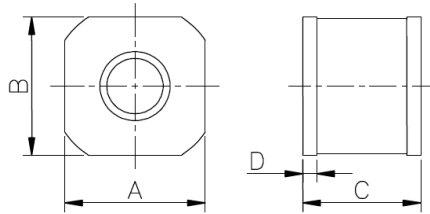


Recommended Pad Layout

Symbol	Millimeters	Inches
X	1.2	0.047
X1	4.0	0.165
Y	5.5	0.217



Taping and Reel Specifications

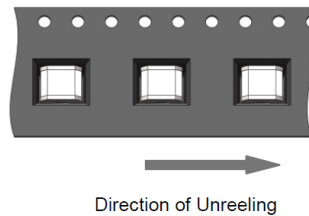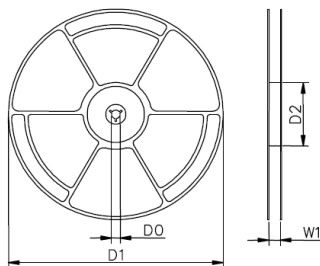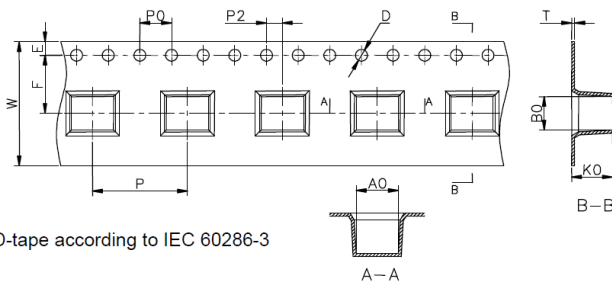

Symbol	Millimeters	Inches
W	16±0.3	0.630±0.012
A0	5.3±0.1	0.209±0.004
B0	4.3±0.1	0.17±0.004
K0	5.2±0.1	0.205±0.004
P	12±0.1	0.472±0.004
F	7.5±0.1	0.295±0.004
E	1.75±0.1	0.069±0.004
D	1.5+0.1/-0.0	0.059+0.004/-0.0
P0	4±0.1	0.157±0.004
P2	2±0.1	0.079±0.004
T	0.4±0.1	0.016±0.004
D0	13.3±0.15	0.524±0.006
D1	330±2	12.992±0.079
D2	100+1/-2	3.937+0.039/-0.079
W1	16.5±0.4	0.65±0.016

Packaging Quantity


1,000 PCS per reel (13")

3 reels per inner box

3,000 PCS per inner box

Gas Discharge Tubes(GDT)

Soldering Parameters - Reflow Soldering (Surface Mount Devices)

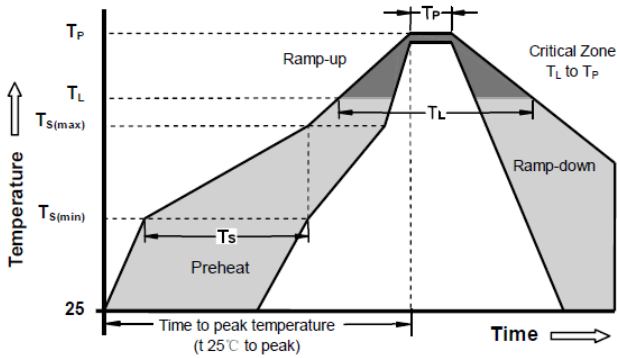

Reflow Condition		Pb - Free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	-Time (min to max) (t_s)	60 -180 Seconds
Average ramp up rate (Liquids Temp T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquids)	217°C
	- Time (min to max) (t_s)	60 -150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5°C of actual peak Temperature (t_p)		10 - 30 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		260°C